

TECHNICAL DATA SHEET

VALSIR® WASTE SYSTEMS

**TRIPLUS
VBF**



valsir®
QUALITY FOR PLUMBING



TRIPLUS

VBF - VENTILATION BRANCH FITTING

Charateristics

Code: VS0651XXXXXX

Raw material: Triplus (PP + Minerals)

Seal material: SBR

Vertical connection D.: 110 mm

Max. number of connections D. 110 mm: 3

Max. number of connections D. 75 mm: 3

Max temperature of waste water: 80° C (continuous)
95° C (intermittent)

Standard achievable flow rate: 8.7 l/s (*)

(*) The achievable flow rate could be increased following verification with Valsir Technical Department.



DESCRIPTION:

Valsir Triplus is an acoustic push-fit waste system with a performance of 12 dB(A) at 2 l/s as per EN14366. The system is manufactured in Italy and certified by leading international bodies, in compliance with EN 1451-1, suitable for the drainage of fluids, and ISO TR 10358.

Valsir VBF is part of Valsir Triplus single stack system and it is made up of an acoustic blend of polypropylene with mineral loads.

Valsir Triplus range is Green Building certified and it is completely halogen free.

Valsir VBF fitting has 6 horizontal branch connections: 3 x DN 100 (OD 110 mm) upper push-fit connections for sanitary fixtures such as urinals, WCs, washbasins, bidets, showers, bathtubs, sinks or any other sanitary fixture and 3 x DN 70 (OD 75 mm) lower push-fit connections for any sanitary fixture.

Valsir VBF fitting is able to improve the ventilation performance of the waste and drainage system, increasing the flow rate is compared to other traditional solutions.

The standard achievable flow rate is 8.7 l/s.


Every Valsir VBF fitting can collect up to 25 DU, as per EN12056.



TRIPLUS

VBF - VENTILATION BRANCH FITTING

Size:

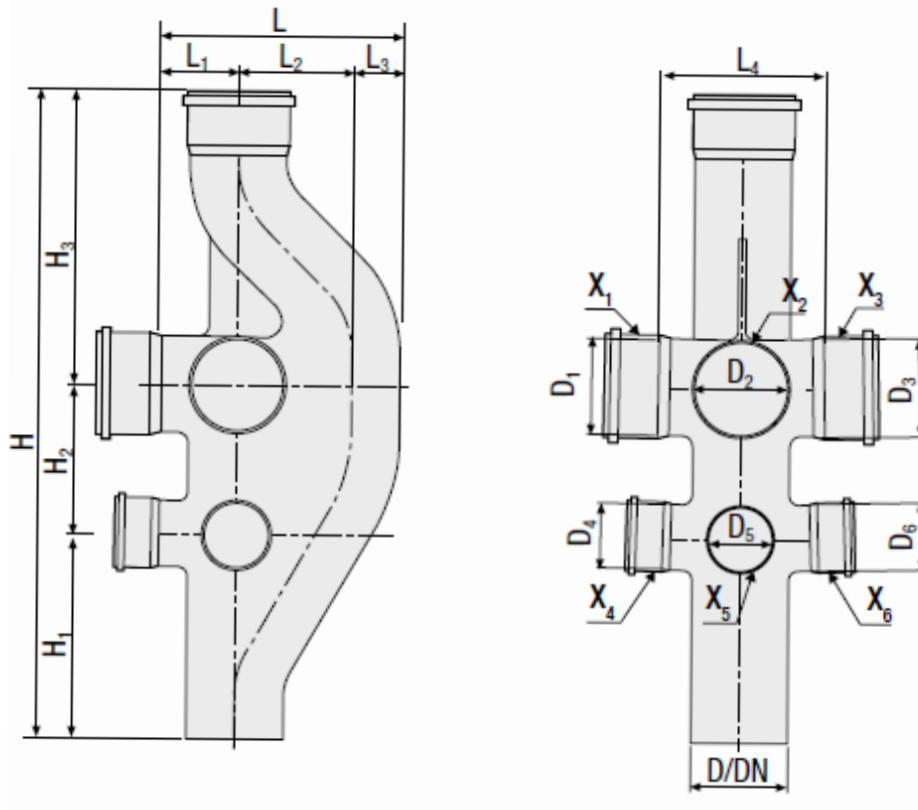

COD.	D	DN	D ₁ /D ₂ /D ₃	D ₄ /D ₅ /D ₆	L	L ₁	L ₂	L ₃	L ₄	L ₅	H	H ₁	H ₂	H ₃
VS0651X ₁ X ₂ X ₃ X ₄ X ₅ X ₆ *	110	100	110	75	265	85	130	50	300	345	780	245	170	365

Approvals:

The approvals of Valsir® waste systems are available on the website: www.valsir.com



TRIPPLUS

VBF - VENTILATION BRANCH FITTING

Charateristics

Code: VS0654XXXXXX

Raw material: Triplus (PP + Minerals)

Seal material SBR

Vertical connection D.: 160 mm

Max. number of connections D. 110 mm: 3

Max. number of connections D. 75 mm: 3

Max temperature of waste water 80° C (continuous)
95° C (intermittent)

Standard achievable flow rate: 18.1 l/s (*)

(*) The achievable flow rate could be increased following verification with Valsir Technical Department.

DESCRIPTION:

Valsir Triplus is an acoustic push-fit waste system with a performance of 12 dB(A) at 2 l/s as per EN14366. The system is manufactured in Italy and certified by leading international bodies, in compliance with EN 1451-1, suitable for the drainage of fluids, and ISO TR 10358.

Valsir VBF is part of Valsir Triplus single stack system and it is made up of an acoustic blend of polypropylene with mineral loads.

Valsir Triplus range is Green Building certified and it is completely halogen free.

Valsir VBF fitting has 6 horizontal branch connections: 3 x DN 100 (OD 110 mm) upper push-fit connections for sanitary fixtures such as urinals, WCs, washbasins, bidets, showers, bathtubs, sinks or any other sanitary fixture and 3 x DN 70 (OD 75 mm) lower push-fit connections for any sanitary fixture.

Valsir VBF fitting is able to improve the ventilation performance of the waste and drainage system, increasing the flow rate is compared to other traditional solutions.

The standard achievable flow rate is 18.1 l/s.

Every Valsir VBF fitting can collect up to 25 DU, as per EN12056.






TRIPPLUS

VBF - VENTILATION BRANCH FITTING

Size:

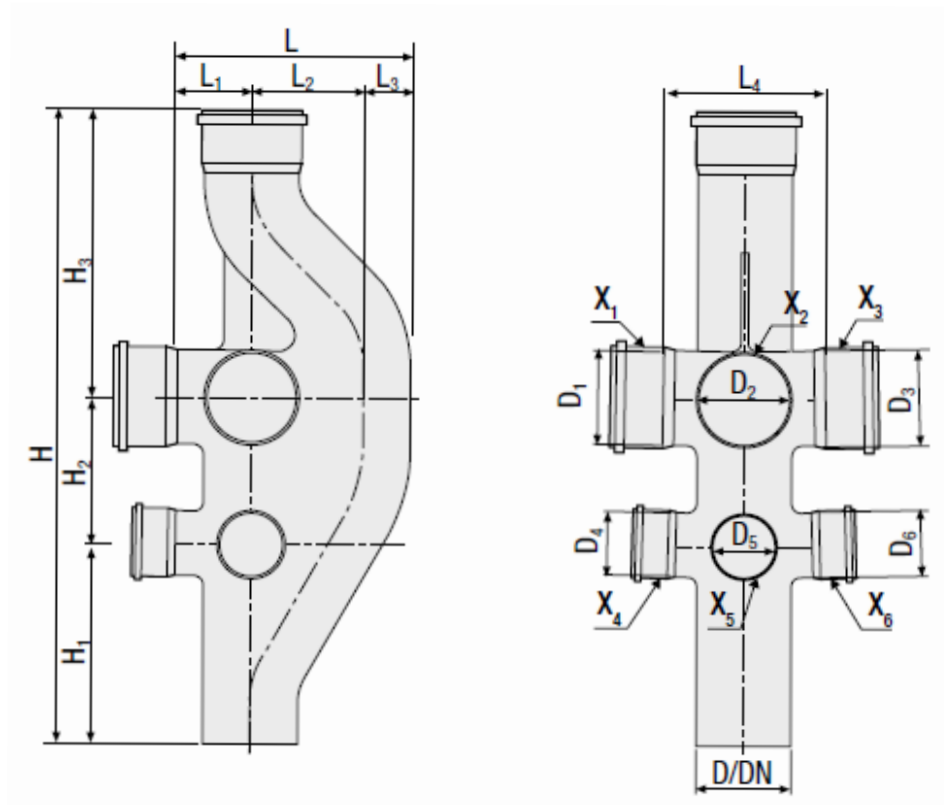

COD.	D	DN	D ₁ /D ₂ /D ₃	D ₄ /D ₅ /D ₆	L	L ₁	L ₂	L ₃	L ₄	L ₅	H	H ₁	H ₂	H ₃
VS0654X ₁ X ₂ X ₃ X ₄ X ₅ X ₆ *	160	150	110	75	300	100	145	55	340	380	880	310	170	400

Approvals:

The approvals of Valsir® waste systems are available on the website: www.valsir.com

PLUMBING

WASTE SYSTEMS



SUPPLY SYSTEMS



GAS SYSTEMS



FLUSH SYSTEMS



BATHROOM SYSTEMS



TRAPS



RADIANT SYSTEMS



DRAINAGE SYSTEMS



HRV SYSTEM



ACADEMY



SEWER SYSTEMS



WATER TREATMENT



BUILDING

valsir[®]
QUALITY FOR PLUMBING

VALSIR S.p.A.
Località Merlaro, 2
25078 Vestone (BS) - Italy
Tel. +39 0365 877.011
Fax +39 0365 81.268
e-mail: valsir@valsir.it

www.valsir.com

Soggetta all'attività di direzione e coordinamento ex art. 2497 bis C.C. da parte di Silmar Group S.p.A. - Codice Fiscale 02075160172

TO2-20241 - Novembre 2017